


angor
MATERIAL HANDLING

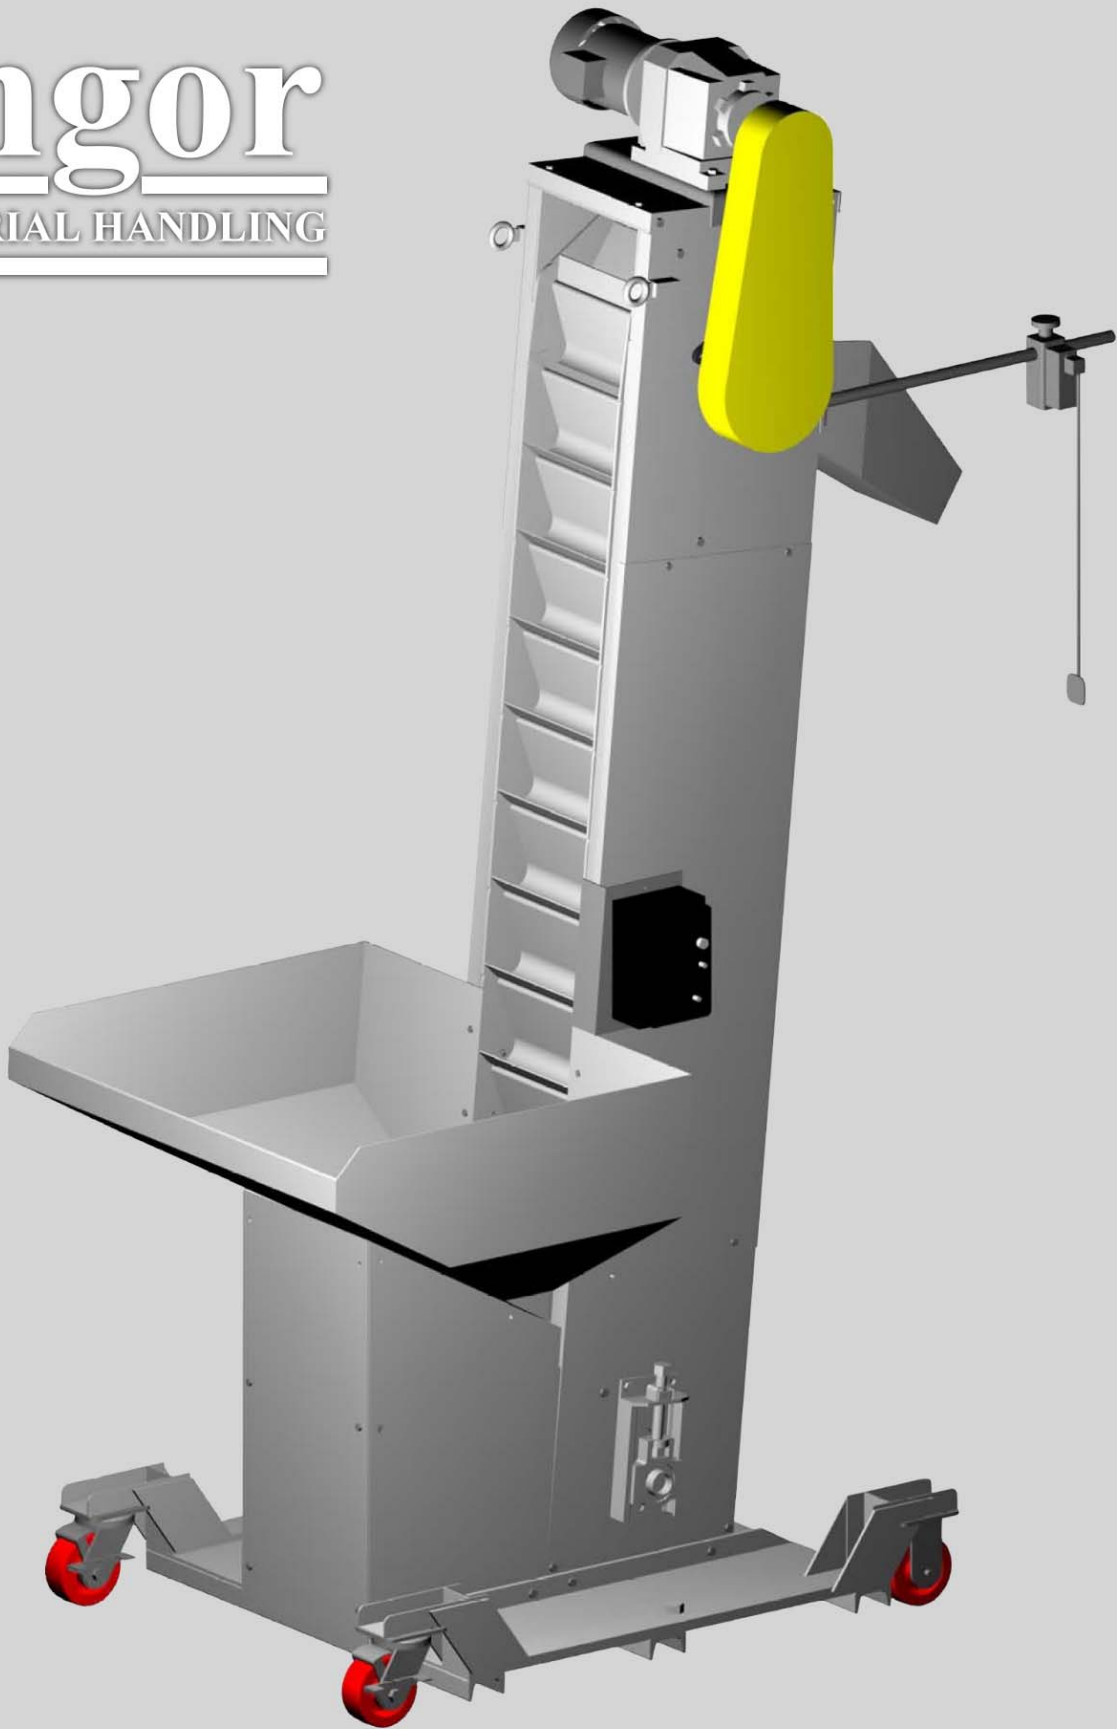

**600 SERIES
BUCKET LOADER**

SPECIFICATIONS

CONSTRUCTION:

- 3/16" thick frame
- Welded 5/8" thick Runner System
- Bolted access panels (sides & back)

DRIVE:

- ½ HP, 1725 RPM, 230/460V/3ph
- Inverter Duty (12-60 Hz)
- Torque Limiter - 30-tooth sprocket
- 50 pitch drive chain (2:1 reduction)

CONTROLLER:

- AC Variable Speed Controller (5-40 FPM)
- Input Voltage: 115/230V/1ph standard
- Limit Switch or Proximity Sensor for automatic On/Off
- X-Y adjustable Paddle or Sensor
- Motor Overload Protection

HOPPER:

- 6.0 cubic ft. Capacity
- 3/16" material thickness
- 30 degree down-angles
- "Zero-Gap" Plate - Adjustable (Hardened 61-63 Rc)

COLOR:

- Vista Green, Safety Blue, Machine Gray



BELT SPECIFICATIONS:

- 11 ga. - formed J-Bucket
- 6" Pitch Bucket
- 10" wide (I.D.)
- 62 cubic inch capacity
- 1/4" thick Sideplates
- Hollow-Pin Chain Design with
- Oversized, Hardened Rollers



USA:

2217 Eddie Williams Rd.
Johnson City, TN 37601
Phone: (423) 434-9696
Fax: (423) 434-9797

Canada:

89 Galaxy Blvd, Unit 4
Toronto, Ontario M9W 6A4
Phone: (416) 675-1025
Fax: (416) 675-3838

Distributed by: